



Texsalon Desagüe



Texsalon Gárgola



Texsalon Colaminado-plancha



Texsalon Líquido



Texsalon Adhesivo Soporte



Texsalon Esquina



Texsalón Rincón



Rodillo Silicona

- A wide range to be installed on any cover with all the accessories needed for its installation.
- Weldable with hot air; no fire is needed, thus allowing a safer implementation.
- Various roll widths to suit the needs of the cover and to provide faster implementation.
- Resistant to roots.
- Excellent UV rays stability.
- Installation by highly qualified personnel.
- Resistance to low temperatures.
- White surface, with high solar reflection rate.
- Recyclable, environmental friendly product.

TexsaSynthetics

- TEXSA SYNTHETICS is a Spanish company belonging to the TEXSA group, specialised in synthetic and geosynthetic membranes for the waterproofing industry.
- TEXSA SYNTHETICS is dedicated to the constant search for new products and systems, to provide comprehensive solutions according to project requirements, meeting the demands of this important sector.
- TEXSA SYNTHETICS has a wide range of products and its customers can count on personal expert technical and customer service.
- TEXSA SYNTHETICS counts on more than 50 years experience of the TEXSA group, carrying out constant internal and external quality controls.

Central office
TEXSA SYNTHETICS, S.A.
 Llanos de Jerez, 1
 28820 Coslada (Madrid) Spain
 Tel. (+34) 91 673 69 19
 Fax (+34) 91 674 36 44
 E-mail: info@texsasynthetics.com
<http://www.texsasynthetics.com>

Production plant
 Calle Ferro, 7
 Poligono Can Pelegrí
 08755 Castellsbisbal (Barcelona)
 Spain



● Dolce Vita Mall. A Coruña (Spain). TEXSALON MP - 45.000 m²

OP T Texsalon

Waterproofing roof system

TPO Texsalon

Waterproofing roof system




The TEXSALON product range consists of synthetic waterproofing membranes based on thermoplastic polyolefin (TPO), together with the necessary accessories for its installation. The advanced polymerization process allows the obtainment of highly durable uniform films (both reinforced and un-reinforced).



Examples of waterproofing systems


For further information see www.texsasynthetics.com

Non - Trafficable metal deck Mechanically fastened exposed membrane

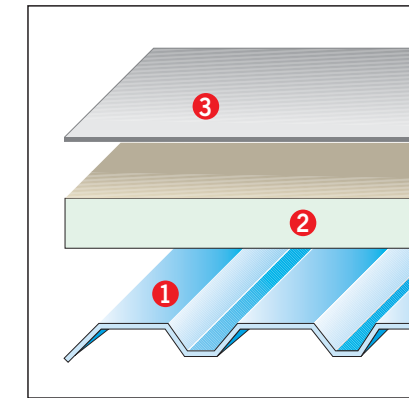


1. Metal sheet support.
2. Thermal Insulation Aisladeck.
3. Waterproofing membrane TEXSALON MP.

Non-Trafficable flat roof Mechanically fastened exposed membrane

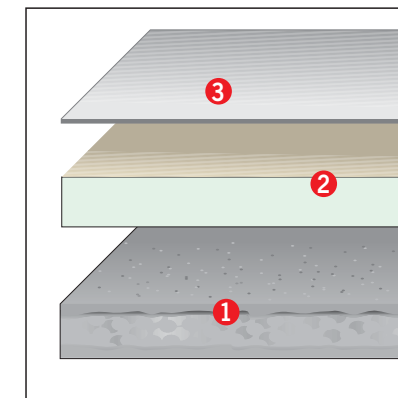


1. Concrete substrate and slope formation.
2. Thermal Insulation Aisladeck.
3. Waterproofing membrane TEXSALON MP.

Non-Trafficable flat roof Rounded gravel

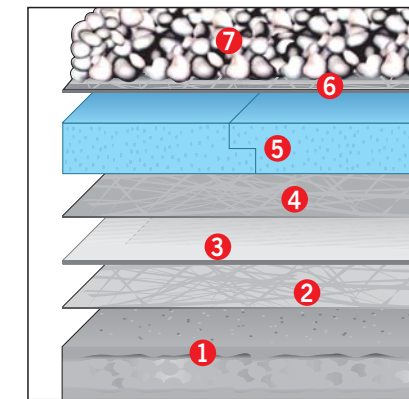


1. Concrete substrate and slope formation.
2. Geotextile Separating layer Rooftex 300.
3. Waterproofing membrane TEXSALON MP.
4. Separating layer Rooftex 150.
5. Thermal insulation Roofmate SL.
6. Geotextile Separating layer Rooftex 300.
7. Rounded gravel.

Trafficable flat roof Ceramic tile

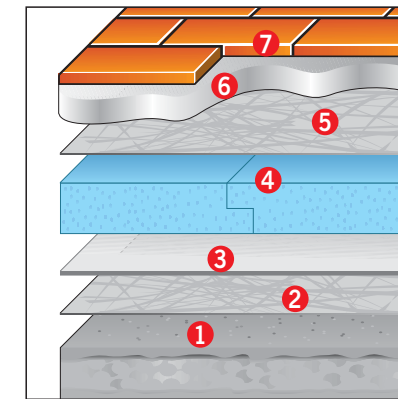


1. Concrete substrate and slope formation.
2. Geotextile Separating Layer Rooftex 300.
3. Waterproofing membrane TEXSALON MP.
4. Thermal Insulation Roofmate SL.
5. Geotextile de protection Rooftex 300.
6. Mortar.
7. Ceramic tile.

Trafficable flat roof Insulating tile Texlosa

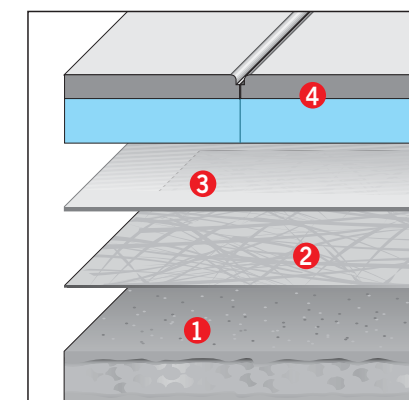

1. Concrete substrate and slope formation
2. Geotextile Separating layer Rooftex 300.
3. Waterproofing membrane TEXSALON MP.
4. Insulating Tile Texlosa

Trafficable flat roof Roof Garden

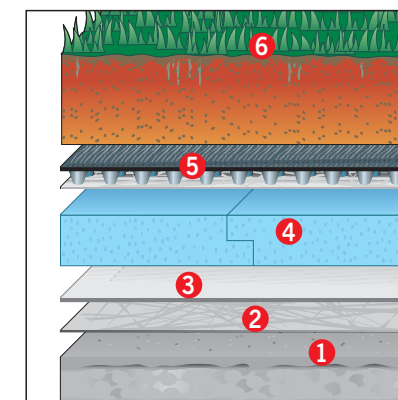

1. Concrete substrate and slope formation.
2. Geotextile Separating layer Rooftex 300.
3. Waterproofing membrane TEXSALON MP.
4. Thermal Insulation Roofmate SL.
5. Sheet drain Drentex Impact Garden.
6. Soil finish.



• Dolce Vita Mall. A Coruña (Spain). TEXSALON MP - 45.000 m²

Texsalon

Synthetic membranes

Product	Colour	Thickness (mm)	U.V. resistance	Reinforcement	Packaging Roll (m)
Texalon MP	White	1.2	YES	Polyester mesh	1.04 x 30 - 2.05 x 20
		1.5			1.04 x 30 - 2.05 x 20
		1.8			1.04 x 30 - 2.05 x 15
Texalon SA	White	1.2 1.5 1.8	YES	Non reinforced	1.04 x 30 - 2.05 x 20 1.04 x 30 - 2.05 x 20 1.04 x 30 - 2.05 x 15

Auxiliary products

Product	Characteristics	Packaging
Texalón Desagüe D 60-75-80-100-110-125mm	Vertical Drain for vertical water outlets	5 Un. Pack
Texsalón Gárgola D65 mm	Horizontal Drain and Gravelguard for water runoff from the roof	5 Un. Pack
Texsalón Esquina	Pre-moulded PVC for outside corner	100 Un. Pack
Texsalón Rincón	Pre-moulded PVC for inside corner	100 Un. Pack
Texsalón Colaminado	Galvanized steel sheet coated with non-reinforced TPO, used for perimeter anchoring and wall terminations	1.00 x 2.00 m Un.
Texsalón Líquido	To seal cut edges where scrim reinforcement is exposed	Tin of 1 ltr
Texsalón Adhesivo Soporte	Adhesive for bonding TPO membrane to different substrates	Pail of 25 kg
Rodillo Silicona	Pressure sensitive silicone roller for installing the membrane	Un.